

PRA118 S/L

SHOTGUN MICROPHONE

Description

The PRA118 shotgun is a highly directional pro electret condenser microphone with a specifically tuned frequency response, making it exceptional at off-axis suppression. The PRA118 is suitable for film, EFP productions, theater sound reinforcement and SNG/ENG tasks.

Features


- Exceptional off-axis suppression
- Very pure sound with no coloration
- Flat on-axis response

Specifications

	PRA118S	PRA118L
Type	Back electret, Ø14mm (Ø0.55")	
Polar Pattern	Shotgun	Shotgun
Frequency Response	30-16,000 Hz	30-16,000 Hz
Sensitivity	-35 dBV/Pa (17.8 mV)	-33 dBV/Pa (22.4 mV)
Impedance	200 Ω	200 Ω
Min. Load Impedance	1,000 Ω	1,000 Ω
Equivalent Noise	20 dB SPL	18 dB SPL
Max. SPL	134 dB SPL	130 dB SPL
S/N Ratio	74 dB	76 dB
Dynamic range	114 dB	112 dB
Power Requirements	12-52V DC	12-52V DC
Connector	XLR3M	XLR3M
Dimensions	Ø20×340 mm (Ø0.79"×13.39")	Ø20×540 mm (Ø0.79"×21.26")
Foam Dimensions	Ø45×250 mm	Ø45×450 mm
Net Weight	200 g (7 oz.)	250 g (8.8 oz.)



PRA118 Frequency Response (Shotgun)

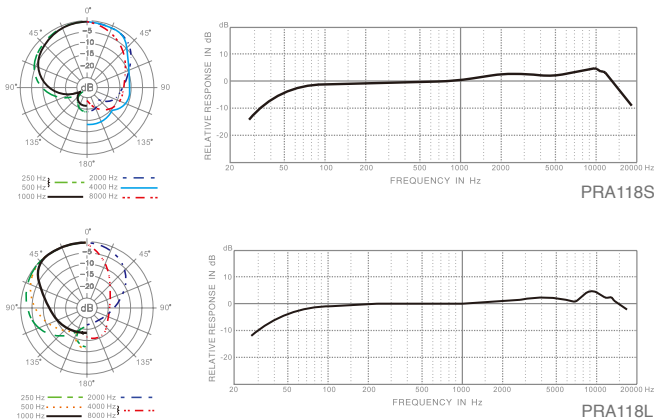

Supplied Accessories



HM375
Mic Clip



S14 (S) / S15 (L)
Shotgun Mic Foam



Carrying
Bag

Optional Accessories



HM35
Shock Mount



HM30
Shock Mount



HM35C
Shock Mount



YA10
Camera Adapter